
unis

Panorama

Show your story in style



EN

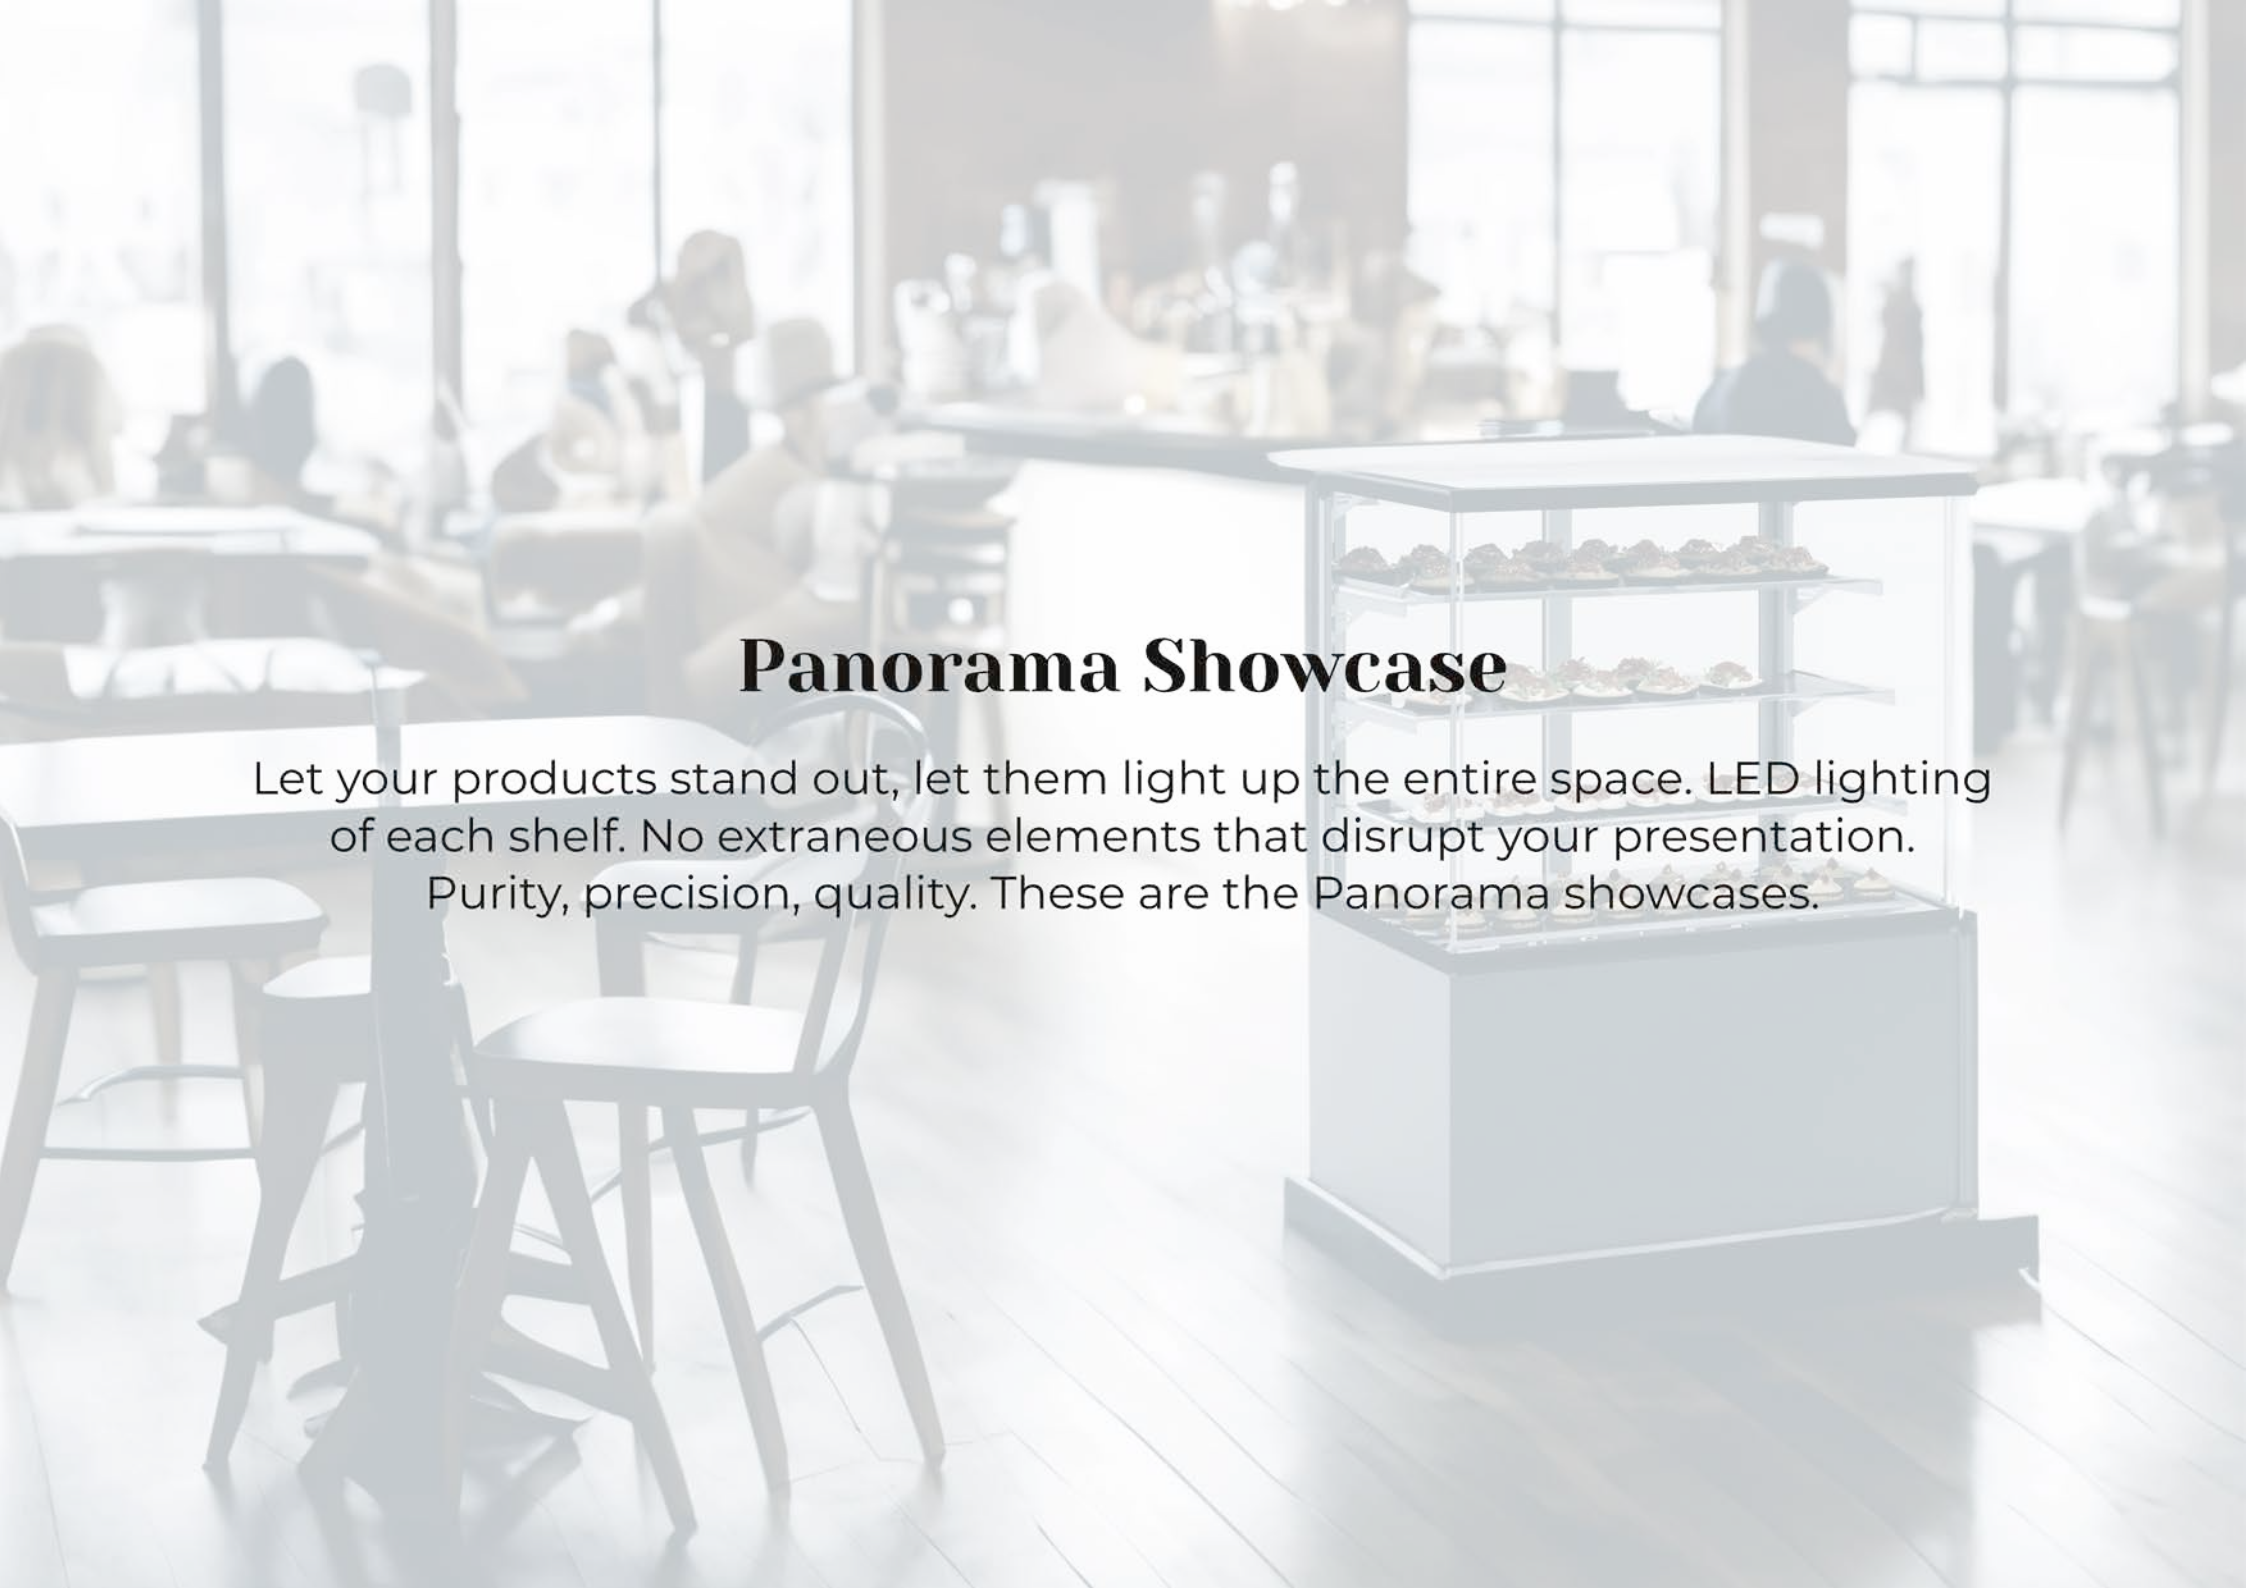

Panorama Showcase

Let your products stand out, let them light up the entire space. LED lighting of each shelf. No extraneous elements that disrupt your presentation. Purity, precision, quality. These are the Panorama showcases.

Panorama

Main Features

Purity from every angle

Front and side double glass are perfectly transparent and allow maximum visibility goods from every angle without distracting elements.



LED lighting

Perfect visibility thanks to the lighting of every shelf. Exhibited products are therefore evenly illuminated without any unwanted shadows.

2 variants of ventilation cooling

Built-in unit for R290 (standard) or CAREL Heosone controls. Possibility of connection to central cooling or as a neutral display case.

5 height variants

-High
-Normal
-Middle
-Low+
-Low

4 levels of sales

Three shelves in the basic equipment. For the High variant, it is possible to add the 4th shelf individually. The possibility of combining into sets (using triple glass).

Panorama

Height Variants



Fully pull-out aggregate

Two variants of **built-in cooling system** give you the opportunity to customize the showcase exactly according to your needs. Choose between a standard **R290** unit or a **Carel Heosone** unit for even greater **energy savings (up to 50%)**. Both variants have a **fully pull-out** aggregate for easier maintenance and service.

Heosone is CAREL's solution for high-efficiency units that operate on propane with DC inverter rotary compressors. **The wide range of modulation** is managed by the inverter, which incorporates the unit controller. The inverter is also responsible for driving the electronic expansion valve, as well as the modulating DC fans, **without the need for any external modules**. Other advantages of using the HEOSONE unit include **better cooling performance, long service life, high energy efficiency, low noise level**.



Fully pull-out aggregate

driven by CAREL


R290


Technical specifications

Panorama Low

– Double transparent tempered glass
– **LED lighting** of the exhibition area
– Choice of front decoration panel
– Choice of **RAL colour** for cover plates
– Ventilation cooling, electronic control unit
– Automatic defrost and evaporation
– Possibility to connect it for remote cooling
– Back **sliding door**
– Hinged front glass for easier cleaning
– Castors as option
– Operating conditions **+25°C/ 60% ambient humidity**



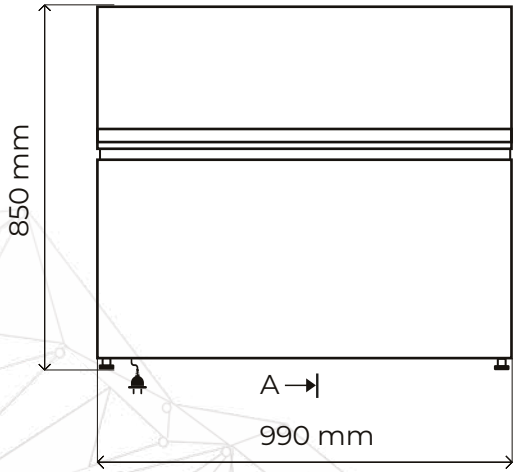

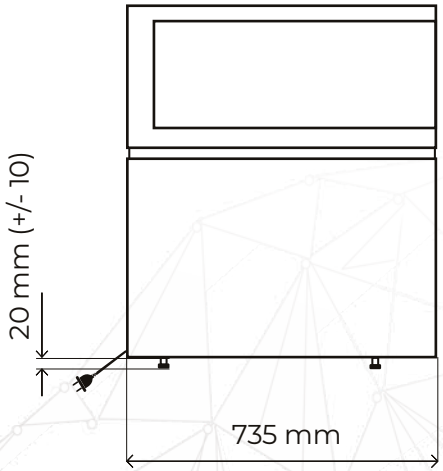


Model	Panorama 1000 Low
Length (mm)	990
Depth (mm)	735
Height (mm)	850
Display area (m2)	0,42
Temperature (°C)	0 / +8
Power (W)	500
Energy class	**D**
Refrigerant	R290
Consumption (kWh/ 24h)	7,8
Voltage (V/ Hz)	230 / 50
Weight (Kg)	145


Technical specifications

Panorama Low+

– A new "LOW+" height variant to complement the Panorama showcase series
– Double transparent tempered glass
– **LED lighting** of the exhibition area
– Choice of front decoration panel
– Choice of **RAL colour** for cover plates
– Ventilation cooling, electronic control unit
– Automatic defrost and evaporation
– Possibility to connect it for remote cooling
– Back **sliding door**
– Hinged front glass for easier cleaning
– Castors as option
– Operating conditions **+25°C/ 60% ambient humidity**



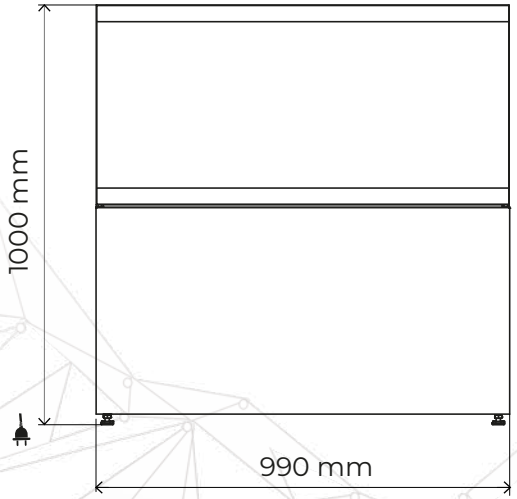

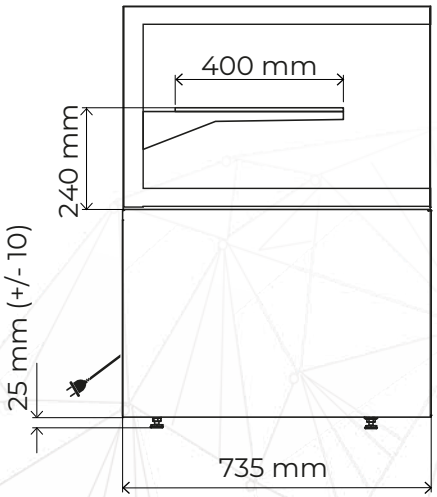


Model	Panorama 1000 LOW+
Length (mm)	990
Width (mm)	735
Height (mm)	1000
Display area (m2)	0,78
Temperature (°C)	0 / +8
Power (W)	432 W
Energy class	**D**
Refrigerant	R290
Consumption (kW/24 h)	6,03
Voltage (V/Hz)	230 / 50
Weight (Kg)	169

Technical specifications

Panorama Middle

– Double transparent tempered glass
– Tempered glass shelves
– **LED lighting** of the exhibition area
– Choice of front decoration panel
– Choice of **RAL colour** for cover plates
– Ventilation cooling, electronic control unit
– Automatic defrost and evaporation
– Possibility to connect it for remote cooling
– Back **sliding door**
– Hinged front glass for easier cleaning
– Castors as option
– Operating conditions **+25°C/ 60% ambient humidity**



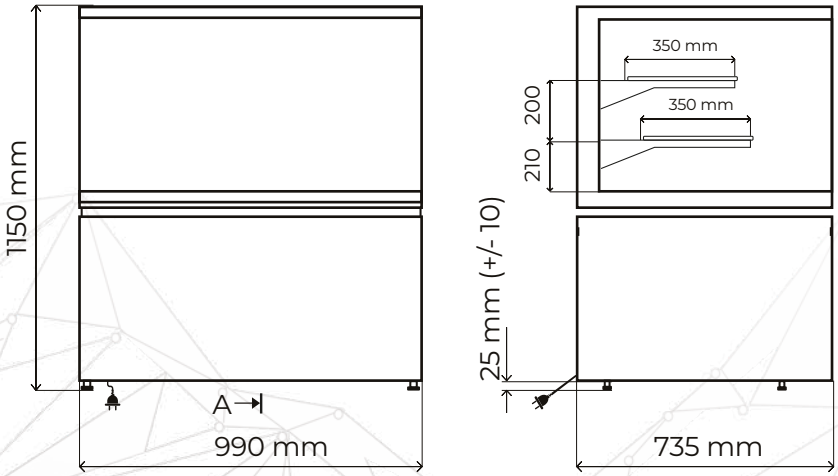

Model	Panorama 1000 Middle		Panorama 1500 Middle	
Length (mm)	990		1490	
Depth (mm)	735		735	
Height (mm)	1150		1150	
Display area (m2)	1,13		1,6	
Temperature (°C)	0 / +8		0 / +8	
Power (W)	*337	640	*494	842
Energy class	C	F	C	F
Refrigerant	R290	R290	R290	R290
Consumption (kWh/ 24h)	3,2	6,56	4,3	8,59
Voltage (V/ Hz)	230 / 50		230 / 50	
Weight (Kg)	192		241	

* aggregate HEOSONE


Technical specifications

Panorama Normal

- Double transparent tempered glass
- Tempered glass shelves
- **LED lighting** of the exhibition area
- Choice of front decoration panel
- Choice of **RAL colour** for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Back **sliding door**
- Hinged front glass for easier cleaning
- Castors as option
- Operating conditions **+25°C/ 60% ambient humidity**

Also in self-service version



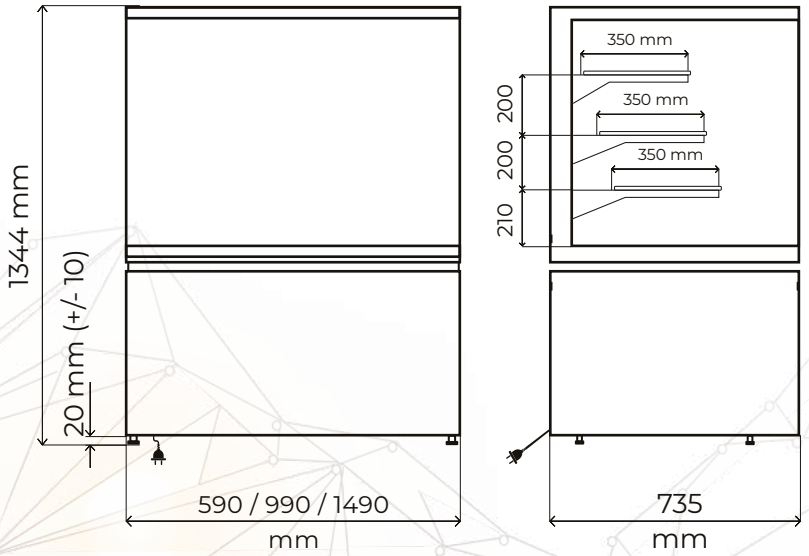

Model	Panorama 600 Normal		Panorama 1000 Normal		Panorama 1500 Normal	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m2)	0,84		1,46		2,1	
Temperature (°C)	0 / +8		0 / +8		0 / +8	
Power (W)	*153	415	*166	515	*485	790
Energy class	C	E	C	F	C	G
Refrigerant	R290	R290	R290	R290	R290	R290
Consumption (kWh/ 24h)	*2,29	6,4	*2,88	7,17	*4,6	12,8
Voltage (V/ Hz)	230 / 50		230 / 50		230 / 50	
Weight (Kg)	143		207		259	

* aggregate HEOSONE

Technical specifications

Panorama High

– Double transparent tempered glass
– Tempered glass shelves
– **LED lighting** of the exhibition area
– Choice of front decoration panel
– Choice of **RAL colour** for cover plates
– Ventilation cooling, electronic control unit
– Automatic defrost and evaporation
– Possibility to connect it for remote cooling
– Back **sliding door**
– Hinged front glass for easier cleaning
– Castors as option
– Operating conditions **+25°C/ 60% ambient humidity**


Version with extra shelf






Also in self-service version



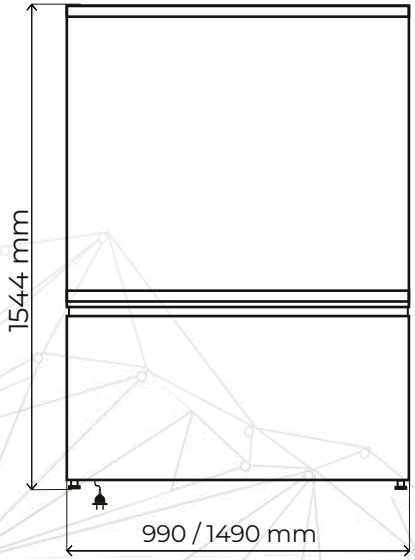

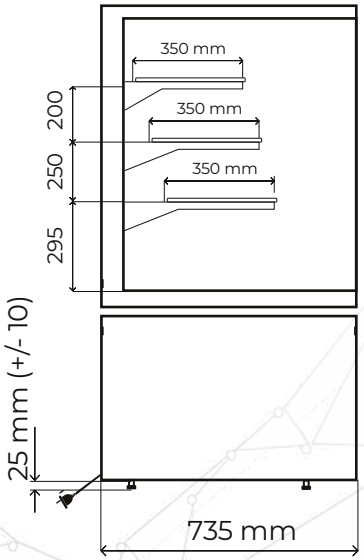

Model	Panorama 600 High		Panorama 1000 High	Panorama 1500 High
Length (mm)	590		990	1490
Depth (mm)	735		735	735
Height (mm)	1544		1544	1544
Display area (m2)	0,84		1,46	2,1
Temperature (°C)	0 / +8		0 / +8	0 / +8
Power (W)	*160	512	180	506
Energy class	C	E	C	C
Refrigerant	R290	R290	R290	R290
Consumption (kWh/ 24h)	*2,6	7,3	3,6	4,78
Voltage (V/ Hz)	230 / 50		230 / 50	230 / 50
Weight (Kg)	151		219	264


* aggregate HEOSONE

Panorama

Service or self-service

Customize your showcase to suit your business needs. Need a self-service? There are **3 ways how to acchieve**, depending on required size/height.


1. Self-servce with **wing door** for 60 cm size only
2. Self-service with **open front glass**
3. Self-service with **front self-closing sliding doors** with smooth operation and minimal opening resistence

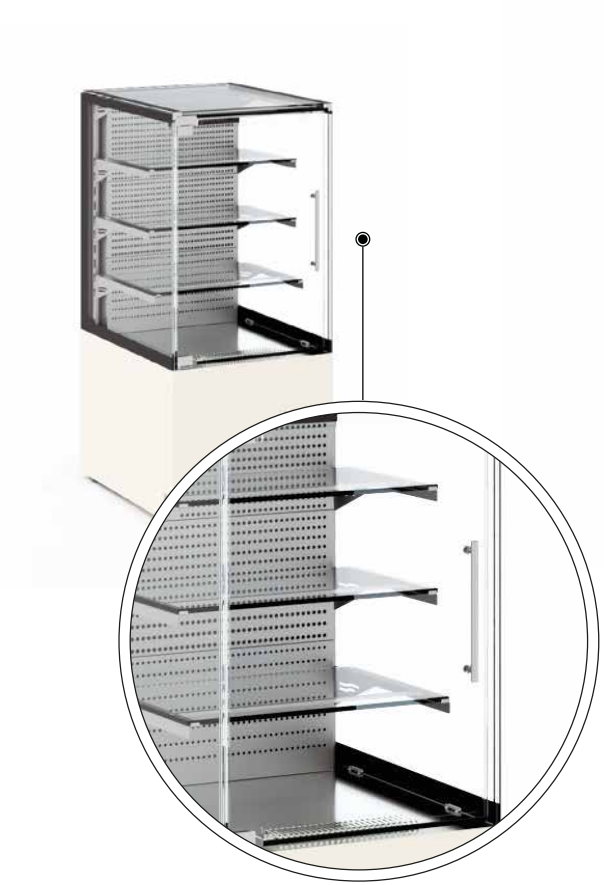

wing door



open front glass

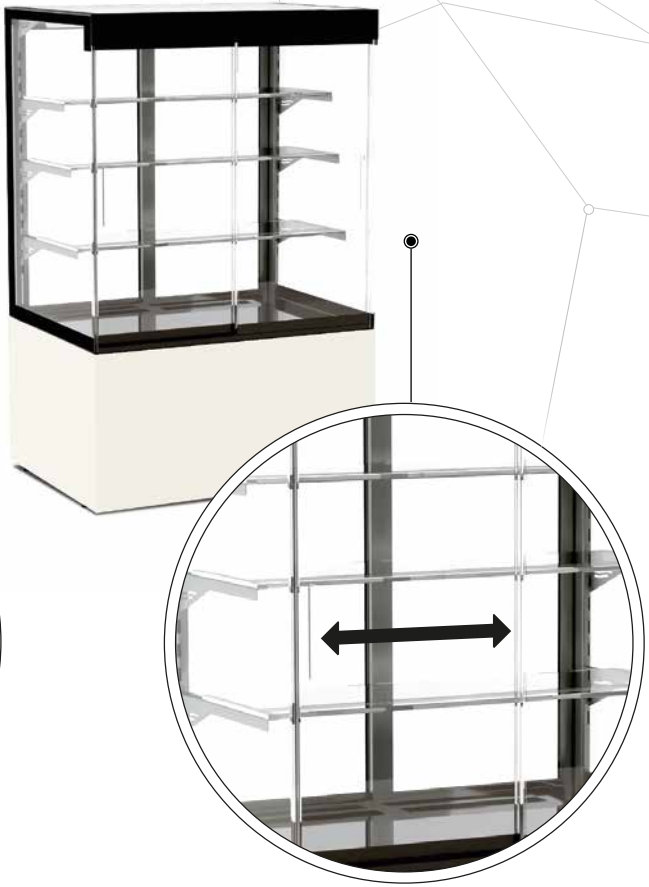


front self-closing sliding doors

Technical specifications


Panorama Jumbo


suitable for 600x400 mm baking trays

– JUMBO display case offers not only **extra length but also depth**, allowing the use of **bakery trays 600x400 mm**
– Double transparent tempered glass
– **LED lighting** of the exhibition area
– Choice of front decoration panel
– Choice of **RAL colour** for cover plates
– Ventilation cooling, electronic control unit
– Automatic defrost and evaporation
– Possibility to connect it for remote cooling
– Back **sliding door**
– Hinged front glass for easier cleaning
– Castors as option
– Operating conditions **+25°C/ 60% ambient humidity**

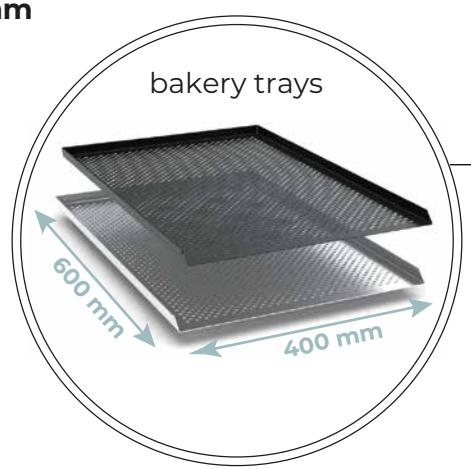



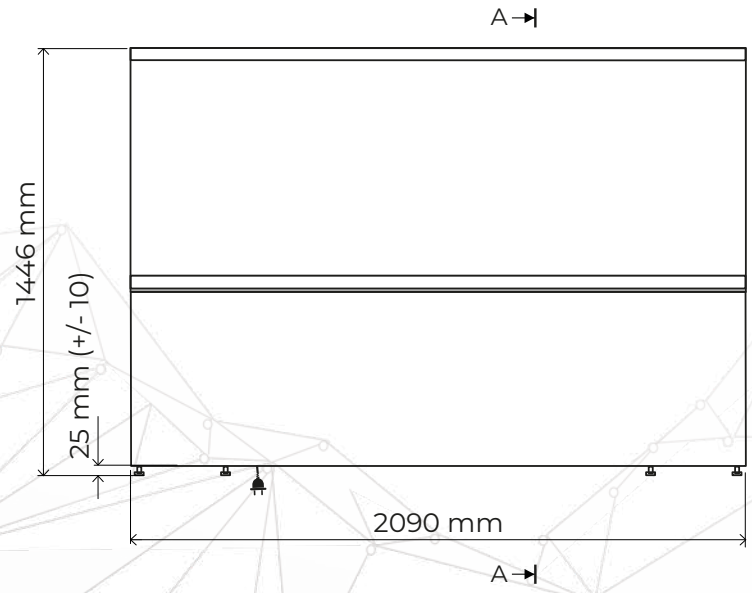

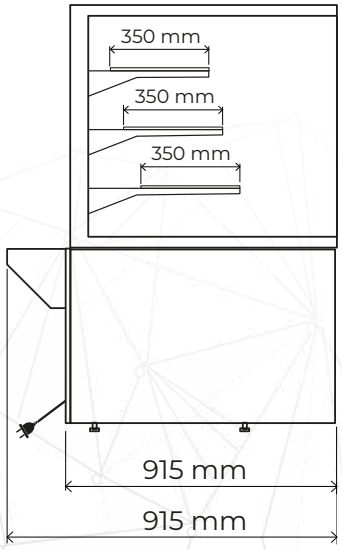

Model	Panorama Jumbo
Length (mm)	2090
Width (mm)	915
Height (mm)	1446
Display area (m2)	2,79
Temperature (°C)	+2 / +6
Power (W)	770
Energy class	**D**
Refrigerant	R290
Consumption (kW/24 h)	13,66
Voltage (V/Hz)	230 / 50
Weight (Kg)	530


Technical specifications

Panorama Static

– Double transparent tempered glass
– Tempered glass shelves
– **LED lighting** of the exhibition area
– Choice of front decoration panel
– Choice of **RAL colour** for cover plates
– **STATIC** cooling, electronic controll unit
– Automatic defrost and evaporation
– Possibility to connect it for remote cooling
– Back **sliding door**
– Hinged front glass for easier cleaning
– Castors as option
– Operating conditions **+25°C/ 60% ambient humidity**




Perfect for delicate sandwiches and sensitive desserts with whipped cream – keeps them fresh and soft.

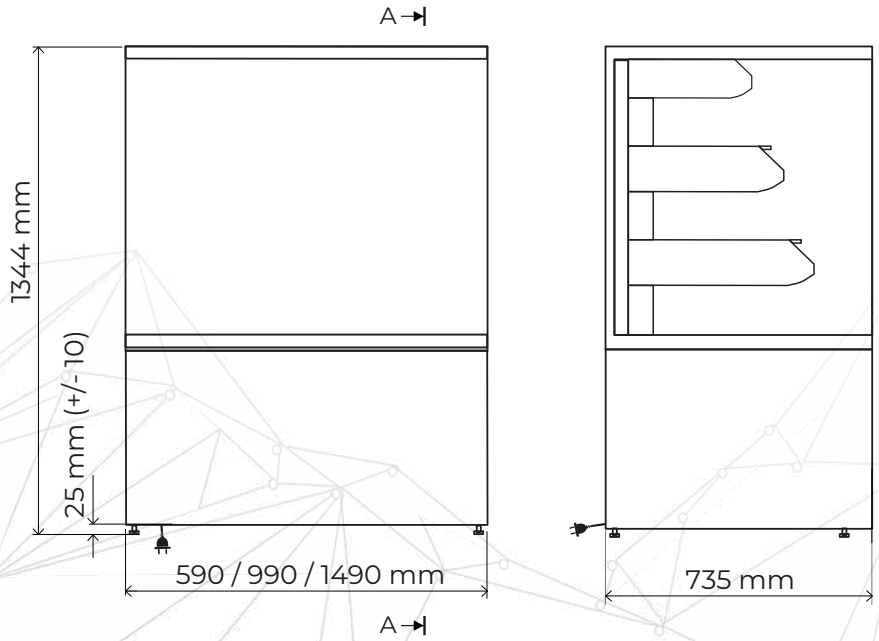

Model	Panorama 600 Static	Panorama 1000 Static	Panorama 1500 Static
Length (mm)	590	990	1490
Width (mm)	735	735	735
Height (mm)	1344	1344	1344
Display area (m2)	0,589	0,978	1,505
Temperature (°C)	+2 / +6	+2 / +6	+2 / +6
Power (W)	340	420	520
Energy class	**D**	**D**	**D**
Refrigerant	R1234YF	R1234YF	R1234YF
Consumption (kW/24 h)	5,51	6,89	8,48
Voltage (V/Hz)	230 / 50	230 / 50	230 / 50
Weight (Kg)	149	213	265

Panorama Low

Design your sales counters exactly the way you want – with custom cladding and **height exactly according your need** thanks to tailored made frame.

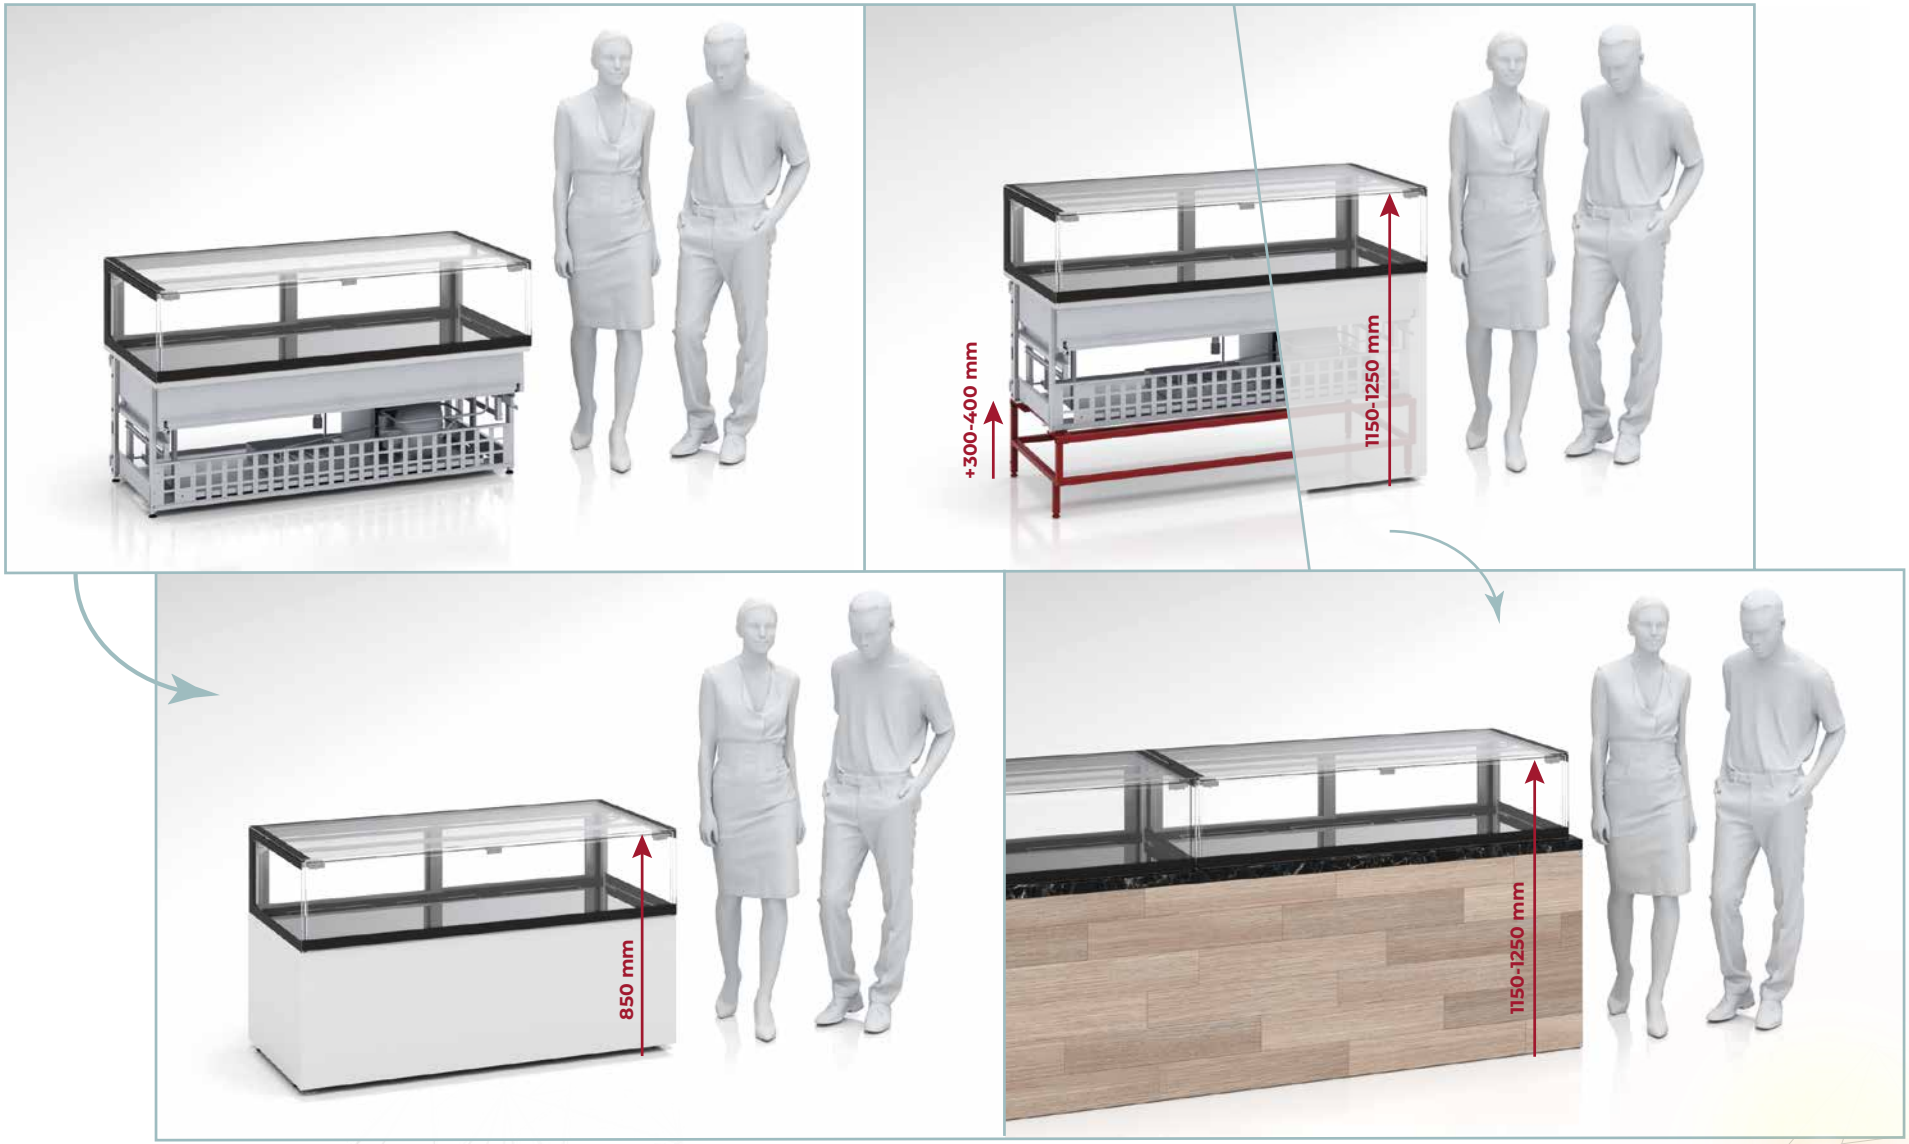


unis
www.uniscool.cz

www.uniscool.cz

UNIS COOL, s.r.o.

Na Baštici 201
739 01, Staré Město
Frýdek-Místek
Czech Republic

Email: **info@uniscool.cz**
Phone: **+420 558 655 211**