

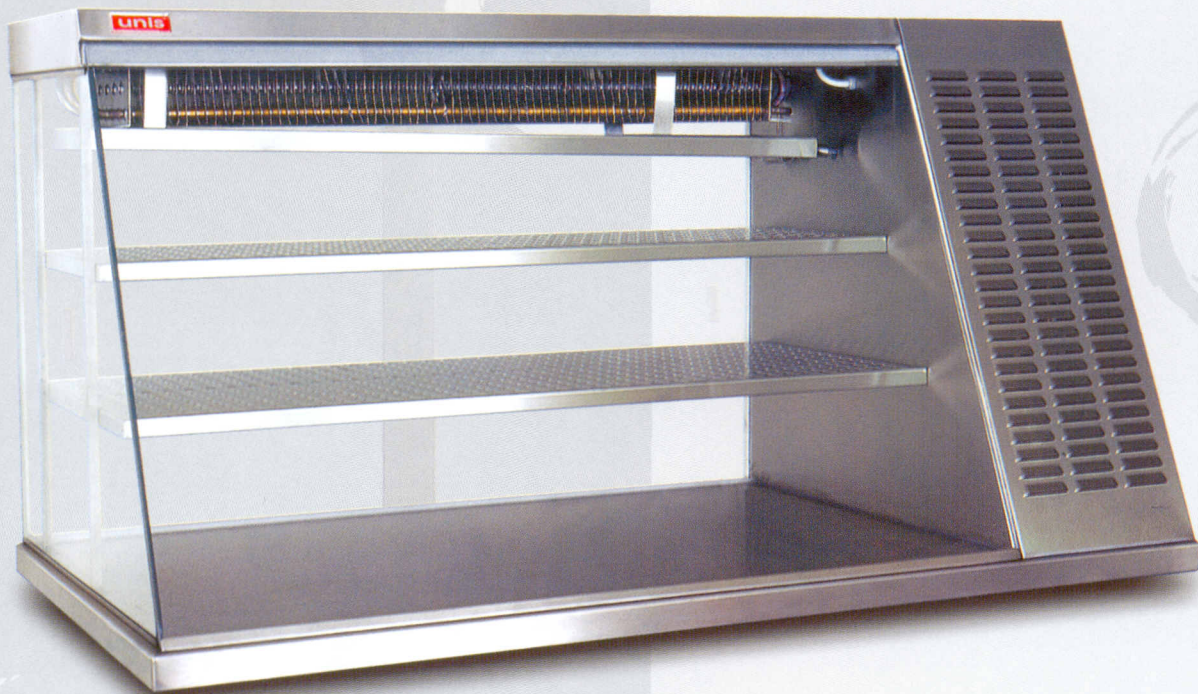
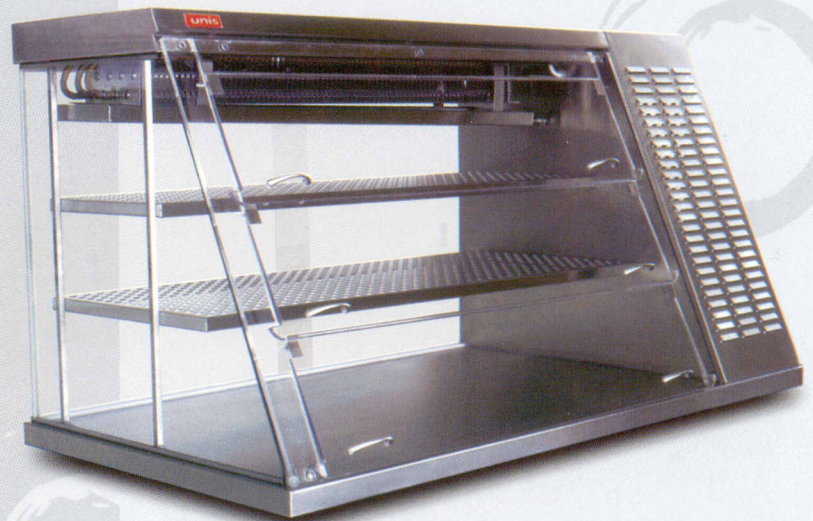


OHIO

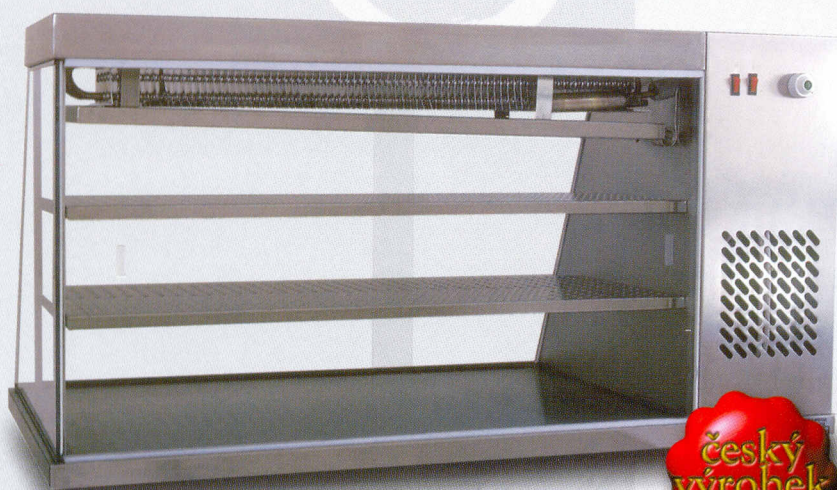

unis

OHIO

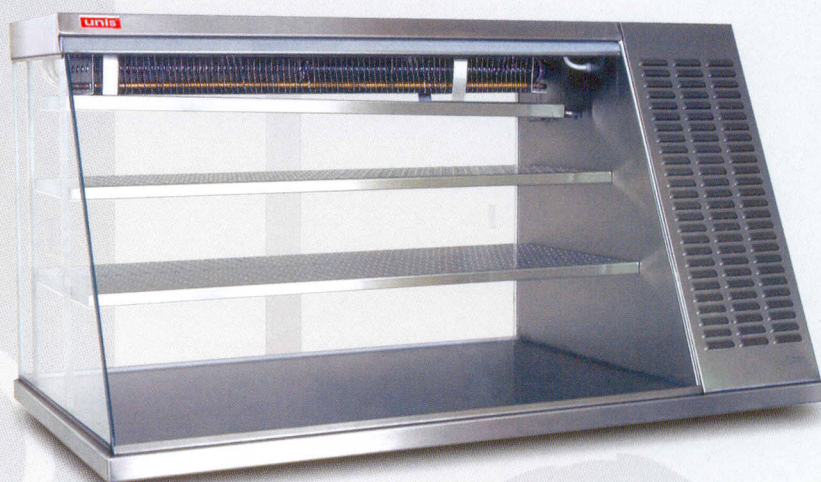

český
výrobek

OHIO

Refrigerated table case Ohio with a built in cooling system is designed for presentation and sale of cooled products. The case's frame is made from stainless steel. Features: electronic regulation, automatic defrosting, operating temperature regulated by a thermostat, temperature range $+2 / +12^{\circ}\text{C}$. The aggregate can be placed according to the customer's requirement on the right side or on the left side of the case. The display area of the case is equipped with two shelves, there is also a fluorescent light in the upper part of the case. The easy access to displayed products allows by the sell over model - the back sliding glass and by the self - service model - the front hinged perplexes. The case is especially convenient for small and medium size shops.

Konstrukční vlastnosti:

- jedna modulová řada
- plášť vitríny a výstavní plocha z nerez oceli AISI 304 18/8
- vnitřní osvětlení
- 2 police
- provedení: - obslužná - čelní sklo
- samoobslužná - odklápěcí plexiskla
- agregát na pravé nebo levé straně

Technické parametry:


- chlazení statické
- automatické odtávání
- termostat
- chladivo R 134a

Construction characteristics:

- one module line
- the glass case cover and the show part is made from stainless steel AISI 304 18/8
- inner lighting
- 2 shelves
- two performance: - sell over model with sliding glass doors
- self-service model with hinged prespexes
- the cooling system on the left or the right side

Technical parameters:

- static refrigerating
- automatic defrosting
- thermostat
- refrigerating gas R 134a

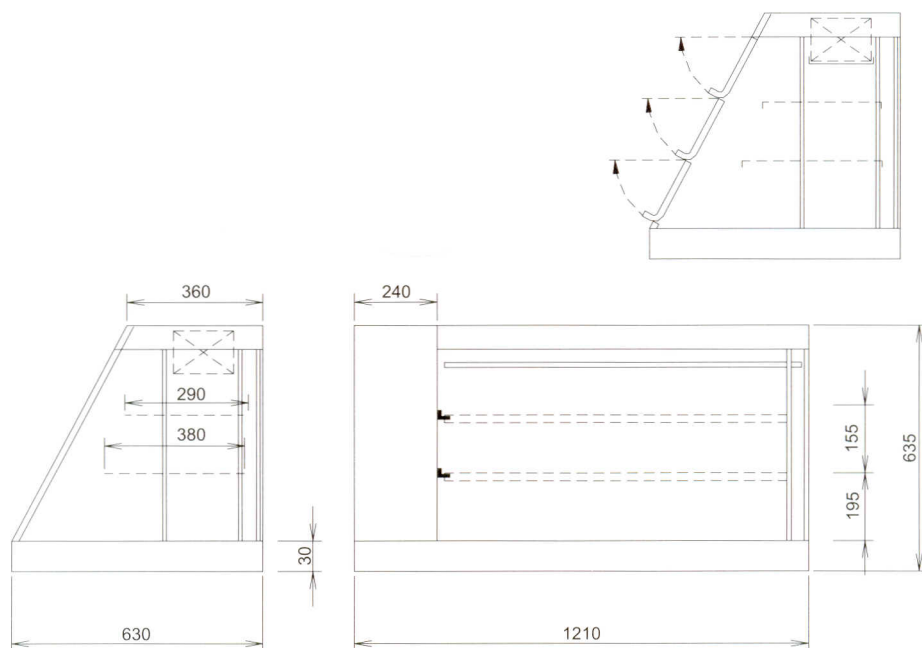

Technické parametry* / Technical parameters*

Délka / Length	1210 mm
Šířka / Width	630 mm
Výška / Height	635 mm
Výstavní plocha / Showing area surface	1,3 m ²
Objem / Capacity	0,27 m ³
Teplotní rozsah / T ₁₁ = 25°C / 60% RH / Temperature range	+2°C / +12°C
Chladicí výkon / t ₀ = -10°C / Refrigerating performance	280 W
Příkon / Input	250 W
Napětí / Voltage	220 V / 50 Hz
Chladivo / Refrigerating liquid	R 134a
Hmotnost / Weight	55 kg

(*) právo změn vyhrazeno / right of change reserved

T₁₁ = okolní teplota / ambient temperature

t₀ = vypařovací teplota / evaporating temperature