


unis

Panorama

Show your story in style



EN

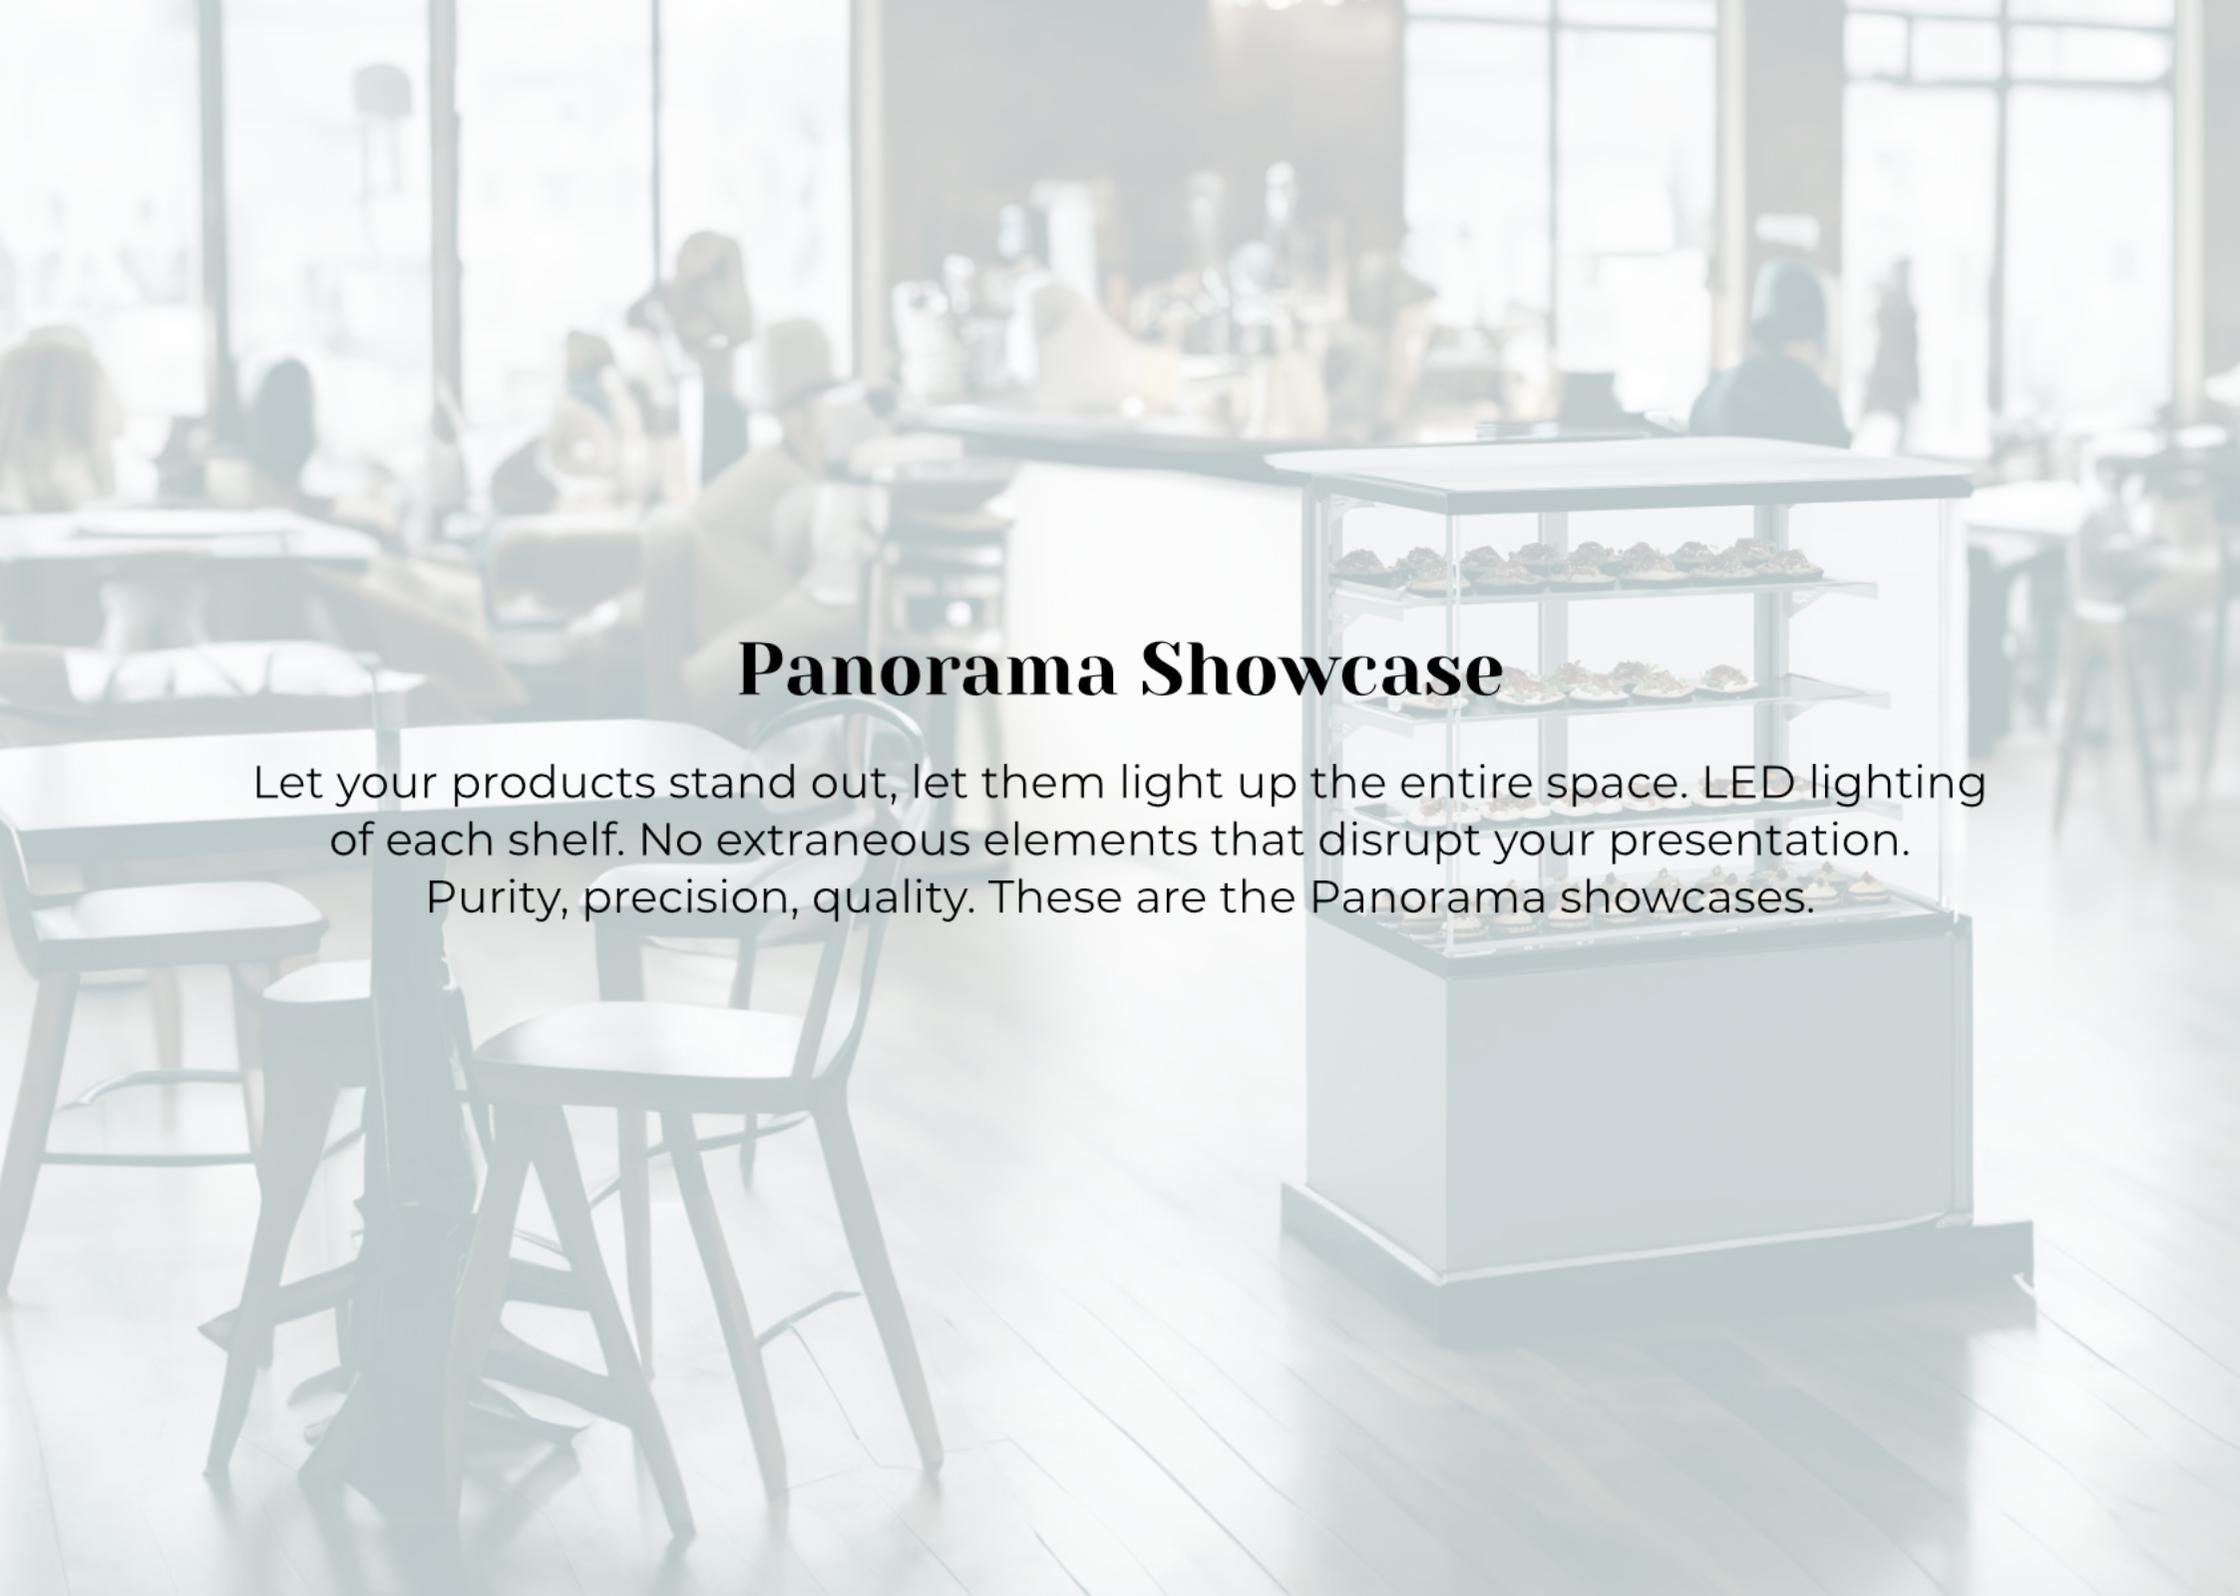A bakery display case filled with pastries is the central focus of the image. The case is a tall, rectangular unit with a glass top and three interior shelves. Each shelf is illuminated from below, highlighting the pastries. The pastries are arranged neatly on each shelf. The background is a blurred cafe interior with people sitting at tables and a counter in the distance. The overall lighting is soft and warm, creating a pleasant atmosphere.

Panorama Showcase

Let your products stand out, let them light up the entire space. LED lighting of each shelf. No extraneous elements that disrupt your presentation. Purity, precision, quality. These are the Panorama showcases.

Main Features

Purity from every angle

Front and side double glass are perfectly transparent and allow maximum visibility goods from every angle without distracting elements.

2 variants of ventilation cooling

Built-in unit for R290 (standard) or CAREL Heosone controls. Possibility of connection to central cooling or as a neutral display case.



4 height variants

- High
- Normal
- Middle
- Low

LED lighting

Perfect visibility thanks to the lighting of every shelf. Exhibited products are therefore evenly illuminated without any unwanted shadows.

4 levels of sales

Three shelves in the basic equipment. For the High variant, it is possible to add the 4th shelf individually. The possibility of combining into sets (using triple glass).

Panorama

Service or self-service

Customize your showcase to suit your business needs. In the self-service version, the windshield consists of a **self-closing door** with smooth operation and minimal opening resistance.



The self-service version is available in lengths of **1000** and **1500 mm** and heights of **1344** and **1544 mm**.



Normal 1500



High 1000



Normal 1000

Panorama

Fully pull-out aggregate

Two variants of **built-in cooling system** give you the opportunity to customize the showcase exactly according to your needs. Choose between a standard **R290** unit or a **Carel Heosone** unit for even greater **energy savings (up to 50%)**. Both variants have a **fully pull-out** aggregate for easier maintenance and service.

Heosone is CAREL's solution for high-efficiency units that operate on propane with DC inverter rotary compressors. **The wide range of modulation** is managed by the inverter, which incorporates the unit controller. The inverter is also responsible for driving the electronic expansion valve, as well as the modulating DC fans, **without the need for any external modules**. Other advantages of using the HEOSONE unit include **better cooling performance, long service life, high energy efficiency, low noise level**.




Fully pull-out aggregate



Technical specifications

Panorama Low

- Double transparent tempered glass
- **LED lighting** of the exhibition area
- Choice of front decoration panel
- Choice of **RAL colour** for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Back **sliding door**
- Hinged front glass for easier cleaning
- Castors as option
- Operating conditions **+25°C/ 60% ambient humidity**

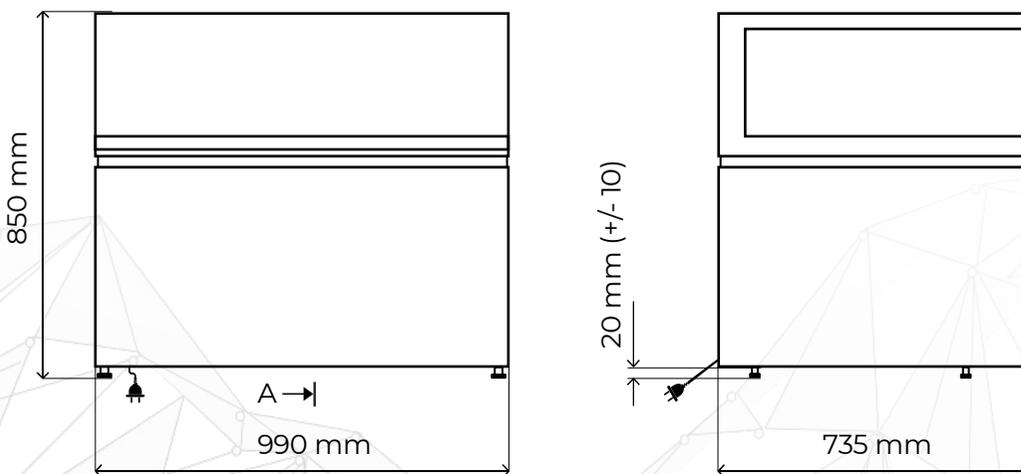


Model	Panorama 1000 Low
Length (mm)	990
Depth (mm)	735
Height (mm)	850
Display area (m2)	0,42
Temperature (°C)	+4/ +8
Power (W)	500
Energy class	D
Refrigerant	R290
Consumption (kWh/ 24h)	7,8
Voltage (V/ Hz)	230/ 50
Weight (Kg)	145

Technical specifications

Panorama Middle

- Double transparent tempered glass
- Tempered glass shelves
- **LED lighting** of the exhibition area
- Choice of front decoration panel
- Choice of **RAL colour** for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Back **sliding door**
- Hinged front glass for easier cleaning
- Castors as option
- Operating conditions **+25°C/ 60% ambient humidity**

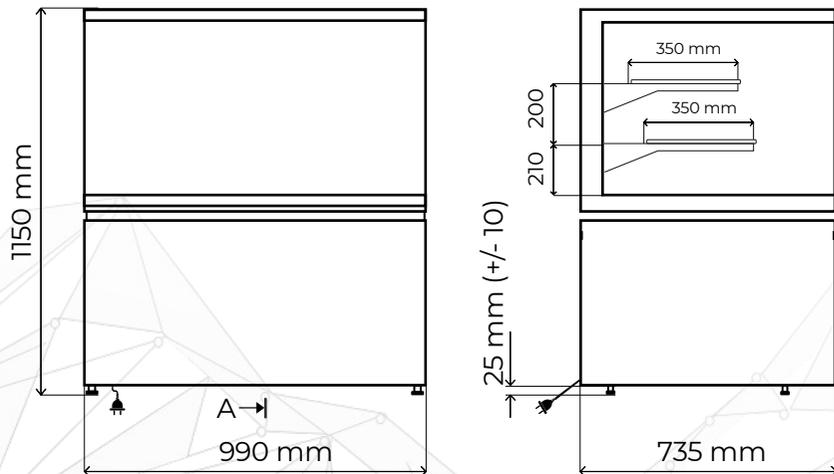

Model	Panorama 1000 Middle		Panorama 1500 Middle	
Length (mm)	990		1490	
Depth (mm)	735		735	
Height (mm)	1150		1150	
Display area (m ²)	1,13		1,6	
Temperature (°C)	+4/ +8		+4/ +8	
Power (W)	*337	640	*494	842
Energy class	C	F	C	F
Refrigerant	R290	R290	R290	R290
Consumption (kWh/ 24h)	3,2	6,56	4,3	8,59
Voltage (V/ Hz)	230/ 50		230/ 50	
Weight (Kg)	192		241	


* aggregate HEOSONE

Technical specifications

Panorama Normal

- Double transparent tempered glass
- Tempered glass shelves
- **LED lighting** of the exhibition area
- Choice of front decoration panel
- Choice of **RAL colour** for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Back **sliding door**
- Hinged front glass for easier cleaning
- Castors as option
- Operating conditions **+25°C/ 60% ambient humidity**

Also in self-service version

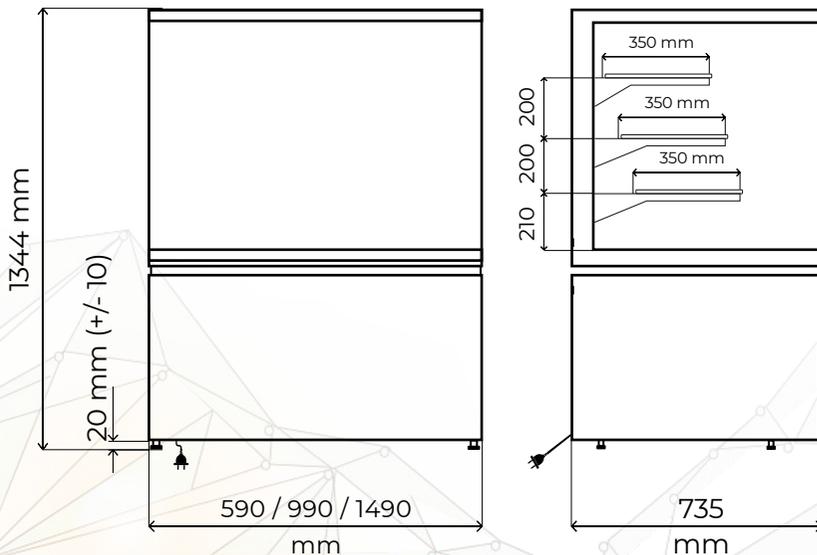

Model	Panorama 600		Panorama 1000		Panorama 1500	
Length (mm)	590		990		1490	
Depth (mm)	735		735		735	
Height (mm)	1344		1344		1344	
Display area (m ²)	0,84		1,46		2,1	
Temperature (°C)	+4 / +8		+4 / +8		+4 / +8	
Power (W)	*153	415	*166	515	*485	790
Energy class	C	E	C	F	C	G
Refrigerant	R290	R290	R290	R290	R290	R290
Consumption (kWh/ 24h)	*2,29	6,4	*2,88	7,17	*4,6	12,8
Voltage (V/ Hz)	230/50		230/50		230/50	
Weight (Kg)	143		207		259	

* aggregate HEOSONE

Technical specifications


Panorama High

- Double transparent tempered glass
- Tempered glass shelves
- **LED lighting** of the exhibition area
- Choice of front decoration panel
- Choice of **RAL colour** for cover plates
- Ventilation cooling, electronic control unit
- Automatic defrost and evaporation
- Possibility to connect it for remote cooling
- Back **sliding door**
- Hinged front glass for easier cleaning
- Castors as option
- Operating conditions **+25°C/ 60% ambient humidity**

Version with extra shelf



Also in self-service version

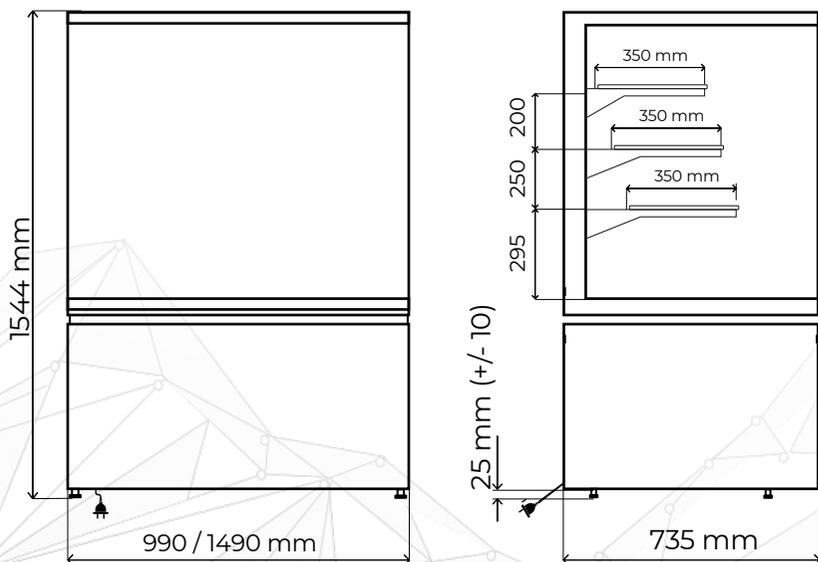

Model	Panorama 600 High	Panorama 1000 High	Panorama 1500 High	
Length (mm)	590	990	1490	
Depth (mm)	735	735	735	
Height (mm)	1544	1544	1544	
Display area (m ²)	0,84	1,46	2,1	
Temperature (°C)	+4 / +8	+4 / +8	+4 / +8	
Power (W)	*160	512	180	506
Energy class	C	E	C	C
Refrigerant	R290	R290	R290	R290
Consumption (kWh/24h)	*2,6	7,3	3,6	4,78
Voltage (V/ Hz)	230/50	230/50	230/50	230/50
Weight (Kg)	151	219	264	

* aggregate HEOSONE



unis

www.uniscool.cz



www.uniscool.cz

UNIS COOL, s.r.o.

Na Baštici 201
739 01, Staré Město
Frýdek-Místek
Czech Republic

Email: info@uniscool.cz
Phone: **+420 558 655 211**